



SHEET METAL CONNECTORS, INC.

www.smduct.com

MINNEAPOLIS, MN
 5850 Main Street N.E.
 Minneapolis, Minnesota 55432
 LOCALLY CALL: 763-572-0000
 TOLL FREE: 1-800-328-1966
 FAX: 763-572-1100


ROCKFORD, IL
 5601 Sandy Hollow Road
 Rockford, Illinois 61109
 LOCALLY CALL: 815-874-4600
 TOLL FREE: 1-866-504-4600
 FAX: 815-874-9979



Single Wall Spiral Pipe

Diam.	26 Gauge lbs./ft.	24 Gauge lbs./ft.	22 Gauge lbs./ft.	20 Gauge lbs./ft.	18 Gauge lbs./ft.	16 Gauge lbs./ft.
3"	0.8	1.1	1.3	1.5		
4"	1.1	1.4	1.7	2.0		
5"	1.4	1.7	2.1	2.5	3.2	4.0
6"	1.6	2.0	2.5	3.0	3.9	4.5
7"	1.9	2.4	2.9	3.4	4.6	5.6
8"	2.1	2.8	3.3	3.9	5.2	6.3
9"	2.4	3.1	3.8	4.4	5.9	7.2
10"	2.6	3.4	4.2	4.9	6.5	7.9
11"	2.9	3.8	4.6	5.4	7.1	8.7
12"	3.2	4.1	5.0	5.9	7.8	9.5
13"		4.5	5.4	6.4	8.5	10.2
14"		4.8	5.8	6.9	9.1	11.1
15"		5.1	6.2	7.4	9.8	11.9
16"		5.5	6.6	7.8	10.4	12.7
17"		5.8	7.1	8.3	11.1	13.4
18"		6.1	7.5	8.8	11.7	14.2
20"		6.8	8.3	9.8	13.0	15.8
22"		7.5	9.1	10.8	14.3	17.4
24"		8.2	9.9	11.7	15.6	19.0
26"			10.8	12.7	16.9	20.6
28"			11.6	13.7	18.2	22.2
30"			12.4	14.6	19.5	23.8
32"			13.3	15.6	20.8	25.4
34"			14.1	16.6	22.0	26.9
36"			14.9	17.6	23.3	28.5
38"				18.5	24.6	30.1
40"				19.5	25.9	31.7
42"				20.5	27.2	33.3
44"				21.5	28.5	34.9
46"				22.5	29.8	36.4
48"				23.4	31.1	38.0
50"				24.5	32.4	39.6
52"					33.7	41.3
54"					34.8	42.9
56"					36.3	44.5
58"					37.4	46.0
60"					38.9	47.3

Standard gauges in boxed area, weights may vary slightly.

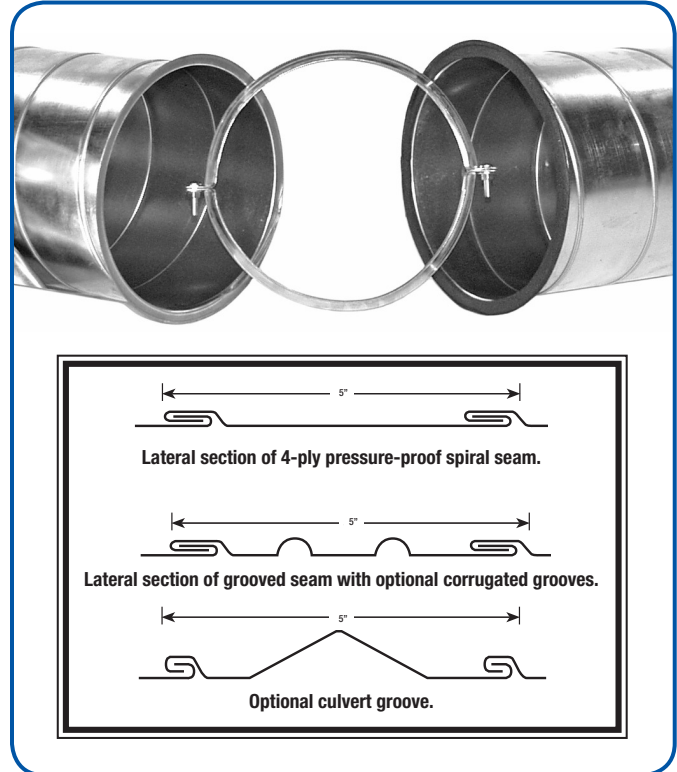

Sheet Metal Connectors, Inc. spiral pipe is formed from a coil of metal into a rigid steel tube with a 4-ply spiral lockseam. It has a smooth interior for low friction loss with the grooved seam entirely on the outside. This pipe has a resistance to crushing approximately 2 1/2 times that of longitudinal lockseam or welded pipe. Optional corrugations are available which increase the rigidity of the pipe by approximately 300%. Pipe sections can be joined together by an E-Z Flange with Barrel Clamp, E-Z Flange Jr. with Barrel Clamp, Standard Spiral Pipe Connector, or Companion Angle Rings.

DIAMETER	MATERIAL	THICKNESS	ASTM	TYPE	LENGTH
3" - 96"	Galvanized	26 - 14 gauge	A-653	G60-G90	1' - 20', 10' Standard
3" - 96"	Paint Grip	24 - 18 gauge	A-653	A60	1' - 20', 10' Standard
3" - 96"	PVS*	24 - 16 gauge	A-653	4 x 1, 4 x 4	1' - 20', 10' Standard
3" - 60"***	Aluminum	.032 - .063	B-316	3003 H-14	1' - 20', 10' Standard
3" - 60"***	Stainless Steel	24 - 18 gauge	A-240	304 or 316	1' - 20', 10' Standard

*PVS specification book available ** Call factory for sizes over 60" in diameter.

