



Access Doors– High Temp

Access Doors For Round and Flat Duct Work

Specifications

- Tested to 20" w.g., with no leakage noted.
- Meets NFPA 96
- Available in 10x6 and 16x12.
- Metal Thickness: 10x06 16 ga. Black iron
- 16x12 16 ga. Black iron
- Ceramic fiber gasket (2,300°) ensures an air tight seal
- Zinc coated wing nuts are easily turned by hand
- Self adhesive template is provided for easy installation.
- Zinc coated conical springs installed between the inner and outer door.




Packaging

- LHTAD Access Doors are sold as single units.

Profile

- Available sizes: 10x06 Flat
12x08 Flat
16x12 Flat
10x06x 6" through 30"
16x12x 18" through 60"

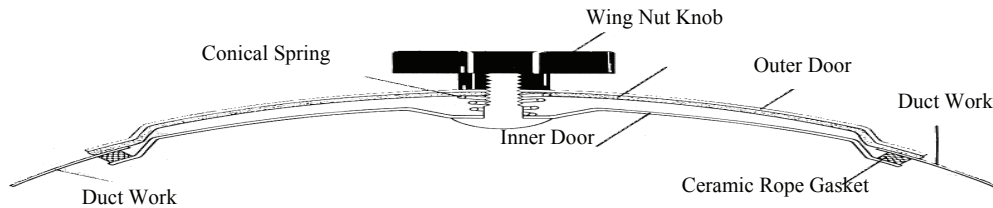

Installation Instructions

1. Adhere self adhesive template to ductwork.
2. Using a pair of sheet metal snips, cut out the template.
3. Unscrew wing nuts of door and insert into the opening
4. Tighten wing nuts.



1100 Ashwood Drive Suite 1102
Canonsburg, PA 15317
888.973.7600
www.clward.com