



SHEET METAL CONNECTORS, INC.

MINNEAPOLIS, MN

5850 Main Street N.E.

Minneapolis, Minnesota 55432

LOCALLY CALL: 763-572-0000

TOLL FREE: 1-800-328-1966

FAX: 763-572-1100

www.smcduct.com

ROCKFORD, IL

5601 Sandy Hollow Road

Rockford, Illinois 61109

LOCALLY CALL: 815-874-4600

TOLL FREE: 1-866-504-4600

FAX: 815-874-9979



Submittal Sheet

POLYKEN 229

HEAVY-DUTY CONTRACTOR GRADE DUCT TAPE

POLYKEN® 229

Heavy-Duty Contractor Grade Duct Tape


APPLICATIONS

- Sealing heating and air conditioning duct connections.
- General purpose packaging and bundling.
- Holding insulation materials in place.

FEATURES & BENEFITS

- Specially formulated pressure sensitive adhesive.
- Excellent tensile strength, adhesion, and tack properties.
- Designed for the most demanding HVAC applications.
- Extra thick adhesive to provide excellent sealing bond to all types of surfaces.
- Meets UL 723

CONSTRUCTION

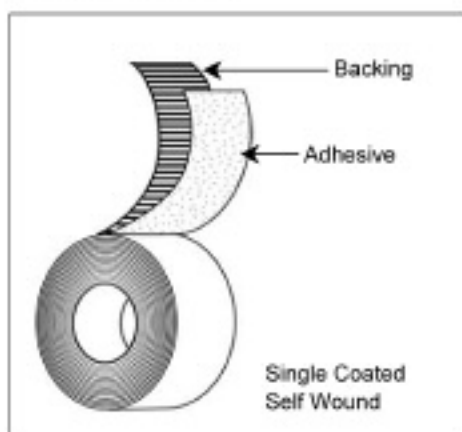

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Coated Cloth

Adhesive:

- Natural Rubber Based

Colors:

- Silver

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	12 mils	0.300 mm	ASTM D 1000
Adhesion to Steel	70 oz./in.	78.4 g/mm	PSTC-1
Adhesion to Backing	30 oz./in.	33.60 g/mm	PSTC-1
Tensile Strength	25 lb./in.	0.45 kg/mm	ASTM D 1000
Maximum Performance Temperature	200 F		
Flame Spread	10		UL 723
Smoke Developed	0		UL 723

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.