



SHEET METAL CONNECTORS, INC.

MINNEAPOLIS, MN
5850 Main Street N.E.
Minneapolis, Minnesota 55432
LOCALLY CALL: 763-572-0000
TOLL FREE: 1-800-328-1966
FAX: 763-572-1100

www.smduct.com

ROCKFORD, IL
5601 Sandy Hollow Road
Rockford, Illinois 61109
LOCALLY CALL: 815-874-4600
TOLL FREE: 1-866-504-4600
FAX: 815-874-9979



Submission Sheet

POLYKEN 827 MULTI-PURPOSE POLYETHYLENE TAPE

POLYKEN® 827

Multi-purpose Polyethylene Tape


APPLICATIONS

- Electroplate masking.
- Splicing polyethylene.
- Sealing packages.
- Holding labels.

FEATURES & BENEFITS

- Can be marked for identification purposes.
- Slightly transparent for holding and protecting labels.
- Resistant to chemicals and moisture.
- Ideal for splicing and repairing.

CONSTRUCTION

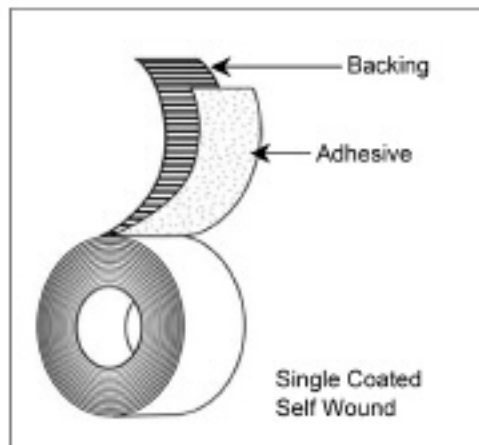

PRODUCT DESCRIPTION

Single-Coated Construction

- | | | |
|---------------------|------------------|----------------|
| Backing: | Adhesive: | Colors: |
| • Polyethylene Film | • Rubber | • White |

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	8 mils	0.200 mm	ASTM D 1000
Adhesion to Steel	60 oz./in.	67.2 g/mm	PSTC-1
Adhesion to Backing	22 oz./in.	24.64 g/mm	PSTC-1
Tensile Strength	23 lb./in.	0.41 kg/mm	ASTM D 1000
Maximum Performance Temperature	180 D F		
Elongation (%)	90 %		
Tack (Rolling Ball)	2.25"		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.