



Access Doors

Access Doors For Round and Flat Duct Work

Specifications

- Tested to 20" w.g. with no leakage noted
- Teseted to negative 10" w.g. with no leakage noted
- Available in 8x4, 10x6, 12x8, 16x12, 18x14, and 24x18
- Metal Thickness: 8x4, 10x06, 12x8 - 22 ga.
16x12, 18x14, 24x18 - 20 ga.
- Available in galvanized, stainless, aluminum, and PVC coated
- Utilizes a closed cell neoprene gasket for optimum sealing
- Self adhesive template provided for easy installation




Packaging

- Access Doors are sold as single units.

Profile

- | | | |
|--------------------|-------|-------------------------------|
| • Available sizes: | 8x4 | 5" through 14" Round |
| | 10x6 | Flat & 6" through 30" Round |
| | 12x8 | Flat & 10" through 20" Round |
| | 16x12 | Flat & 15" through 60" Round |
| | 18x14 | Flat Only |
| | 24x18 | Flat & 29" through 144" Round |

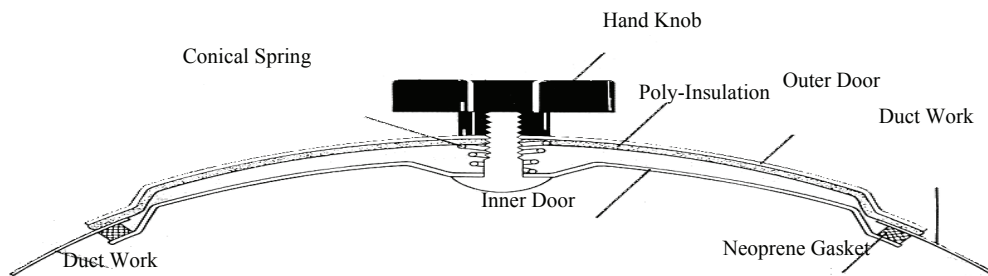

Installation Instructions

1. Adhere self adhesive template to ductwork.
2. Using a pair of sheet metal snips, cut our the tem-plate.
3. Unscrew knobs of door and insert into the opening
4. Tighten knobs.



W
C.L. WARD
& FAMILY INC.

1100 Ashwood Drive Suite 1102
Canonsburg, PA 15317
888.973.7600
www.clward.com